

CONSTRUCTION & MATERIAL PROCESSING



PASSION  PERFORM



EXCEPTIONAL SAFETY AND PERFORMANCE: OUR PRODUCTS MAKE THE DIFFERENCE IN THE CONSTRUCTION!

We are meeting the challenges of the construction industry head on creating robust and innovative products that control contamination; protect machinery from hydraulic failures; and deliver greater reliability, performance and efficiency.

With the vast majority of hydraulic system failures caused by the build-up of contamination, we have developed solutions for our customers that ensure quality, safety and cost savings at every stage of the construction process.

partnership

proven reliability

quality

longer machinery lifespan

worldwide support

MP Filtri has always forged close partnerships with customers thanks to its commitment to meeting their needs and delivering effective solutions. The company offers a wide range of high-performance products including:

KEY PRODUCTS



Return Filters



Return Filters



Low Pressure Filters



High Pressure Filters



Return / Suction Filters



Elixir® Filters

FMMX Series
for potentially
explosive atmosphere

SFEX Series
Suction filters

RFEX Series
Return filters

LFEX Series
Low Pressure filters

RELIABILITY AND QUALITY, WHY MP FILTRI IS THE PERFECT PARTNER

State-of-the-art research and development programmes ensure our products are extensively tested and perfected in our cutting-edge laboratory. A passion for innovation drives everything we do.

Technology and expertise are in the company's DNA

THE MAIN FEATURES THAT DISTINGUISH OUR PRODUCTS ARE:

- ◆ A dramatic reduction in unplanned downtime
- ◆ Support from a dedicated team of technical and commercial specialists
- ◆ The latest research and development technologies
- ◆ A dedicated laboratory for customer-specific tests
- ◆ Authorised distributors worldwide
- ◆ A wide range of precise customisation options



GUARANTEED PERFORMANCE

MULTI-PASS ISO 16889

The ISO Multipass test evaluates the characteristics (or performance) of a filter element, providing data on efficiency and capacity.

ISO standard filtration compared

$\beta_{x(c)} > 1000$ ISO 16889	Filter media code MP Filtri
5 $\mu\text{m}_{(c)}$	A(00)03
7 $\mu\text{m}_{(c)}$	A(00)06
10 $\mu\text{m}_{(c)}$	A(00)10
16 $\mu\text{m}_{(c)}$	A(00)16
21 $\mu\text{m}_{(c)}$	A(00)25

$$\frac{\text{Upstream particles number} > X \mu\text{m}_{(c)}}{\text{Downstream particles number} > X \mu\text{m}_{(c)}} = \beta_{x(c)}$$


Designed to thrive in even the most challenging working conditions

We maintain full control over every element of production from design to delivery




STABILITY OF BETA RATING

DEGREE OF FILTRATION A(00)10,
 $\beta_{10 \mu\text{m}_{(c)}} > 1000$

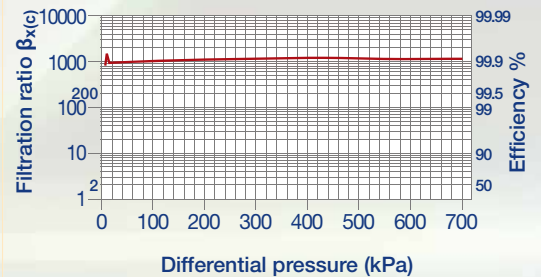

HIGH EFFICIENCY IN ALL CONDITIONS

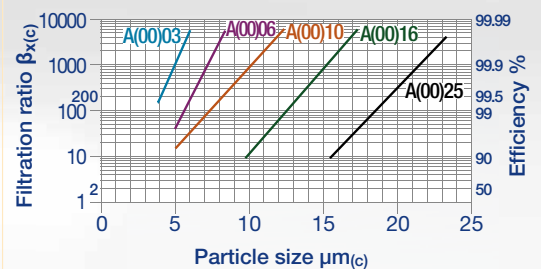

HYDRAULIC FILTRATION

Designing an effective filtration system requires a precise evaluation of its specific features, including: sensitivity of the individual components, the degree and type of contamination, circuit pressure,

flow rate, environmental conditions, fluid used and intervention cycles delivering longer machinery lifespans and reduced service costs.

SUCTION FILTERS



STR
Submerged suction filter, with bypass

up to Q_{max}	
l/min	gpm
875	231

RETURN FILTERS



MDH
"Bubble-free" deaeration filter allows the reduction of air inflow into the tank

up to P_{max}		up to Q_{max}	
bar	psi	l/min	gpm
8	116	750	198
10	145	500	132



MPFX
Tank top semi-immersed filter, easy filter element servicing

MPTX
Tank top semi-immersed filter with air breather, easy filter element servicing

ELIXIR® enables easier maintenance with only the FEX filter elements needing to be replaced - resulting in a lower environmental impact than other models.

up to P_{max}		up to Q_{max}	
bar	psi	l/min	gpm
16	232	300	79

FILTERS ELIXIR®
SFEX SERIES - Suction
RFEX SERIES - Return
LFEX SERIES - Low pressure



RETURN / SUCTION FILTERS



MRSX
Tank top filter with combined filtration on return and suction to the inlet at the hydrostatic transmissions in closed loop

up to P_{max}		up to Q_{max}	
bar	psi	l/min	gpm
10	145	300	79

LOW PRESSURE FILTERS

up to P_{max}		up to Q_{max}	
bar	psi	l/min	gpm
80	1160	175	46

LMP 110 MULTIPORT
In-line filter with Multiport design for multiple choice connection



HIGH PRESSURE FILTERS



FMMX
High pressure filter for mobile applications, low flow rate

up to P_{max}		up to Q_{max}	
bar	psi	l/min	gpm
420	6092	300	79
450	6527	630	166

FHP
Typical high pressure filter for mobile applications, high flow rate



HIGH PRESSURE FILTERS FOR POTENTIALLY EXPLOSIVE ATMOSPHERE

ATEX CERTIFIED PRODUCTS
Standard ATEX Directive 2014/34/EU and UK Regulation S.I. 2016 No. 1107 (as amended).

up to P_{max}		up to Q_{max}	
bar	psi	l/min	gpm
420	6092	300	79

FMMX
High pressure filter for mobile applications, low flow rate



FILTER ELEMENTS

WIDE RANGE OF ELEMENT OPTIONS FOR MYCLEAN AND ZEROSPARK® CONCEPT FILTERS

Wide range of filter elements in various filtration grades for all MP Filtri filters and as interchangeable.



THE **X** CONCEPT FOR OUR FILTERS



THE **Z** ANTISTATIC CONCEPT FOR OUR FILTERS



TANK ACCESSORIES

The complete range of tank accessories for hydraulic circuits comprises breather filters, filler and breather filters, filler caps, visual and electrical level indicators, pressure gauges selectors, flanges for fixing the oil tubes on the tank cover and inspection covers.

Filler and breather filters have a dual function at the tank inlet filtering incoming air pre-filtering the fluid through the basket. This prevents the entry of foreign bodies during the filling or refilling operations.

AIR BREATHERS AND FILLER PLUGS



TAP90

Filling caps and air breathers with multiple technical solutions

up to P_{max}	
l/min	gpm
550	145



TAP114

Nylon oil filler and air breather filler cap

3000	793
1600	423


SAP115
Filler plug and polyamide air filters



VISUAL OIL LEVEL INDICATORS

LVA

Available in three sizes, to monitor the fluid in the tank



POWER TRANSMISSION

COUPLINGS

Drive couplings provide the means by which power is transmitted from the electric motor to the hydraulic pump.



AKG complete couplings are certificated: ATEX 2014/34/EU & U.K. Regulation S.I. 2016 No. 1107 (as amended)

The e-PTO coupling is specifically for electrically powered power take-offs



BELL-HOUSINGS

Bell-Housings are used as connecting elements between IEC electric motors and a wide range of hydraulic pumps available on the international market



CONTAMINATION CONTROL SOLUTIONS

CONTAMINATION MONITORING PRODUCTS



LPA3

Portable Light Extinction Particle Analyser

CML4

Compact Portable Contamination Monitor

IN-LINE CONTAMINATION MONITORS



ICM 2.0

In-Line Contamination Monitor



ICM 4.0

Wifi-enabled In-line Contamination Monitor

MOBILE FILTRATION UNIT

up to Q_{max}	
l/min	gpm
50	13.20



UFM 051

Mobile transfer and filtration units with ICM In-Line Contamination Monitor

MP Filtri designs and manufactures a complete range of contamination control solutions aimed at increasing the life and productivity developed by our hydraulic circuits.

The technology developed by our Contamination Monitoring Products division allows preventive and predictive maintenance, guaranteeing maximum continuity of operation, a longer life cycle of components and a reduction in service and maintenance costs.

WORLDWIDE NETWORK

CANADA ♦ CHINA ♦ FRANCE ♦ GERMANY ♦ INDIA ♦ SINGAPORE
UNITED ARAB EMIRATES ♦ UNITED KINGDOM ♦ USA



PASSION  PERFORM

in   



mpfiltri.com

MP Filtri reserves the right to make modifications to the models and versions of the described products at any time for both technical and/or commercial reasons. For updated information please visit our website: www.mpfiltri.com. The colors and the pictures of the products are purely indicative. Any reproduction, partial or total, of this document is strictly forbidden. All rights are strictly reserved.

MF002000034
EN - 2024.10